


NAME PLATE

COMPONENTS

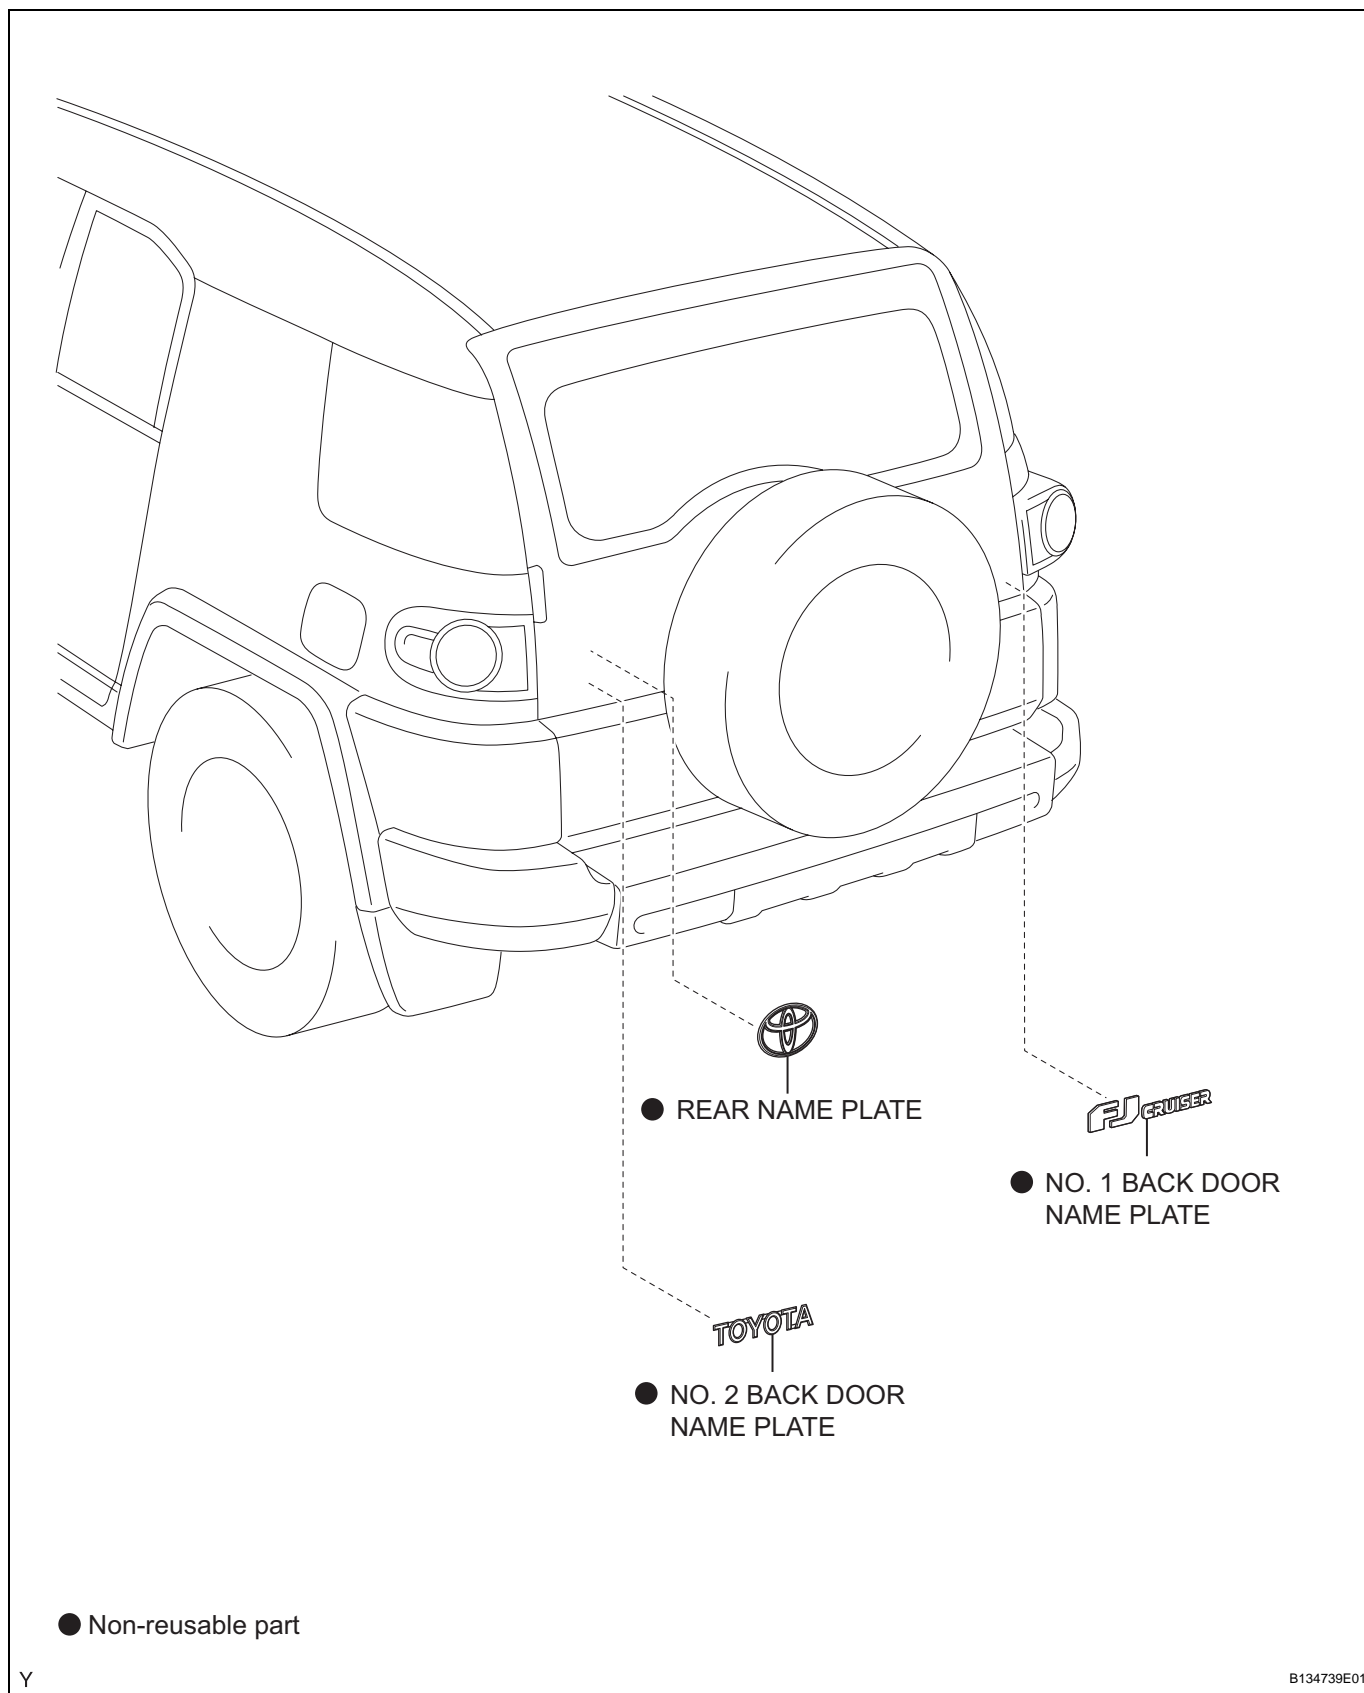

REMOVAL

1. REMOVE NO. 1 BACK DOOR NAME PLATE

- (a) Apply protective tape to the back door panel in the area around the No. 1 back door name plate.
- (b) Using an infrared light, heat the No. 1 back door name plate.




CAUTION:

Do not burn yourself with the heated back door panel or infrared light.

HINT:

Heat at 40 to 60°C (104 to 140°F) for 1 to 2 minutes.

- (c) Using a gasket scraper with its tip wrapped in protective tape, gradually peel the adhesive surface and remove the No. 1 back door name plate.
- (d) Remove the protective tape.

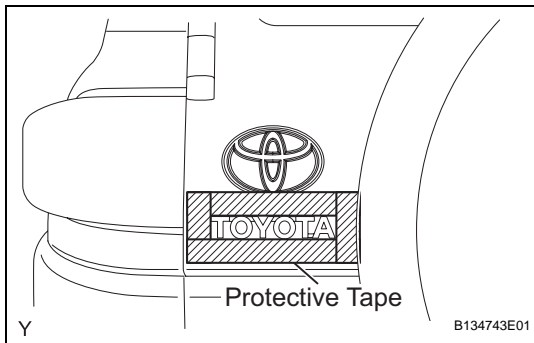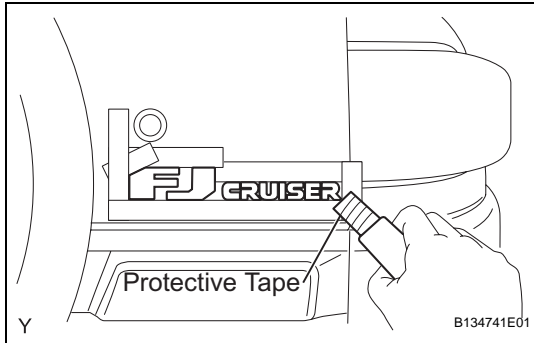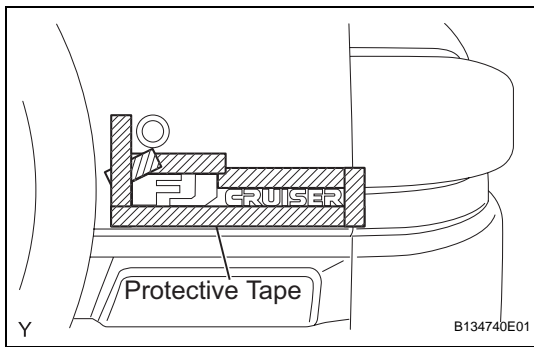

2. REMOVE NO. 2 BACK DOOR NAME PLATE

- (a) Apply protective tape to the back door panel in the area around the No. 2 back door name plate.
- (b) Using an infrared light, heat the No. 2 back door name plate.

CAUTION:

Do not burn yourself with the heated back door panel or infrared light.

HINT:

Heat at 40 to 60°C (104 to 140°F) for 1 to 2 minutes.

- (c) Using a gasket scraper with its tip wrapped in protective tape, gradually peel the adhesive surface and remove the No. 2 back door name plate.
- (d) Remove the protective tape.

