



HIGH MOUNTED STOP LIGHT ASSEMBLY

COMPONENTS


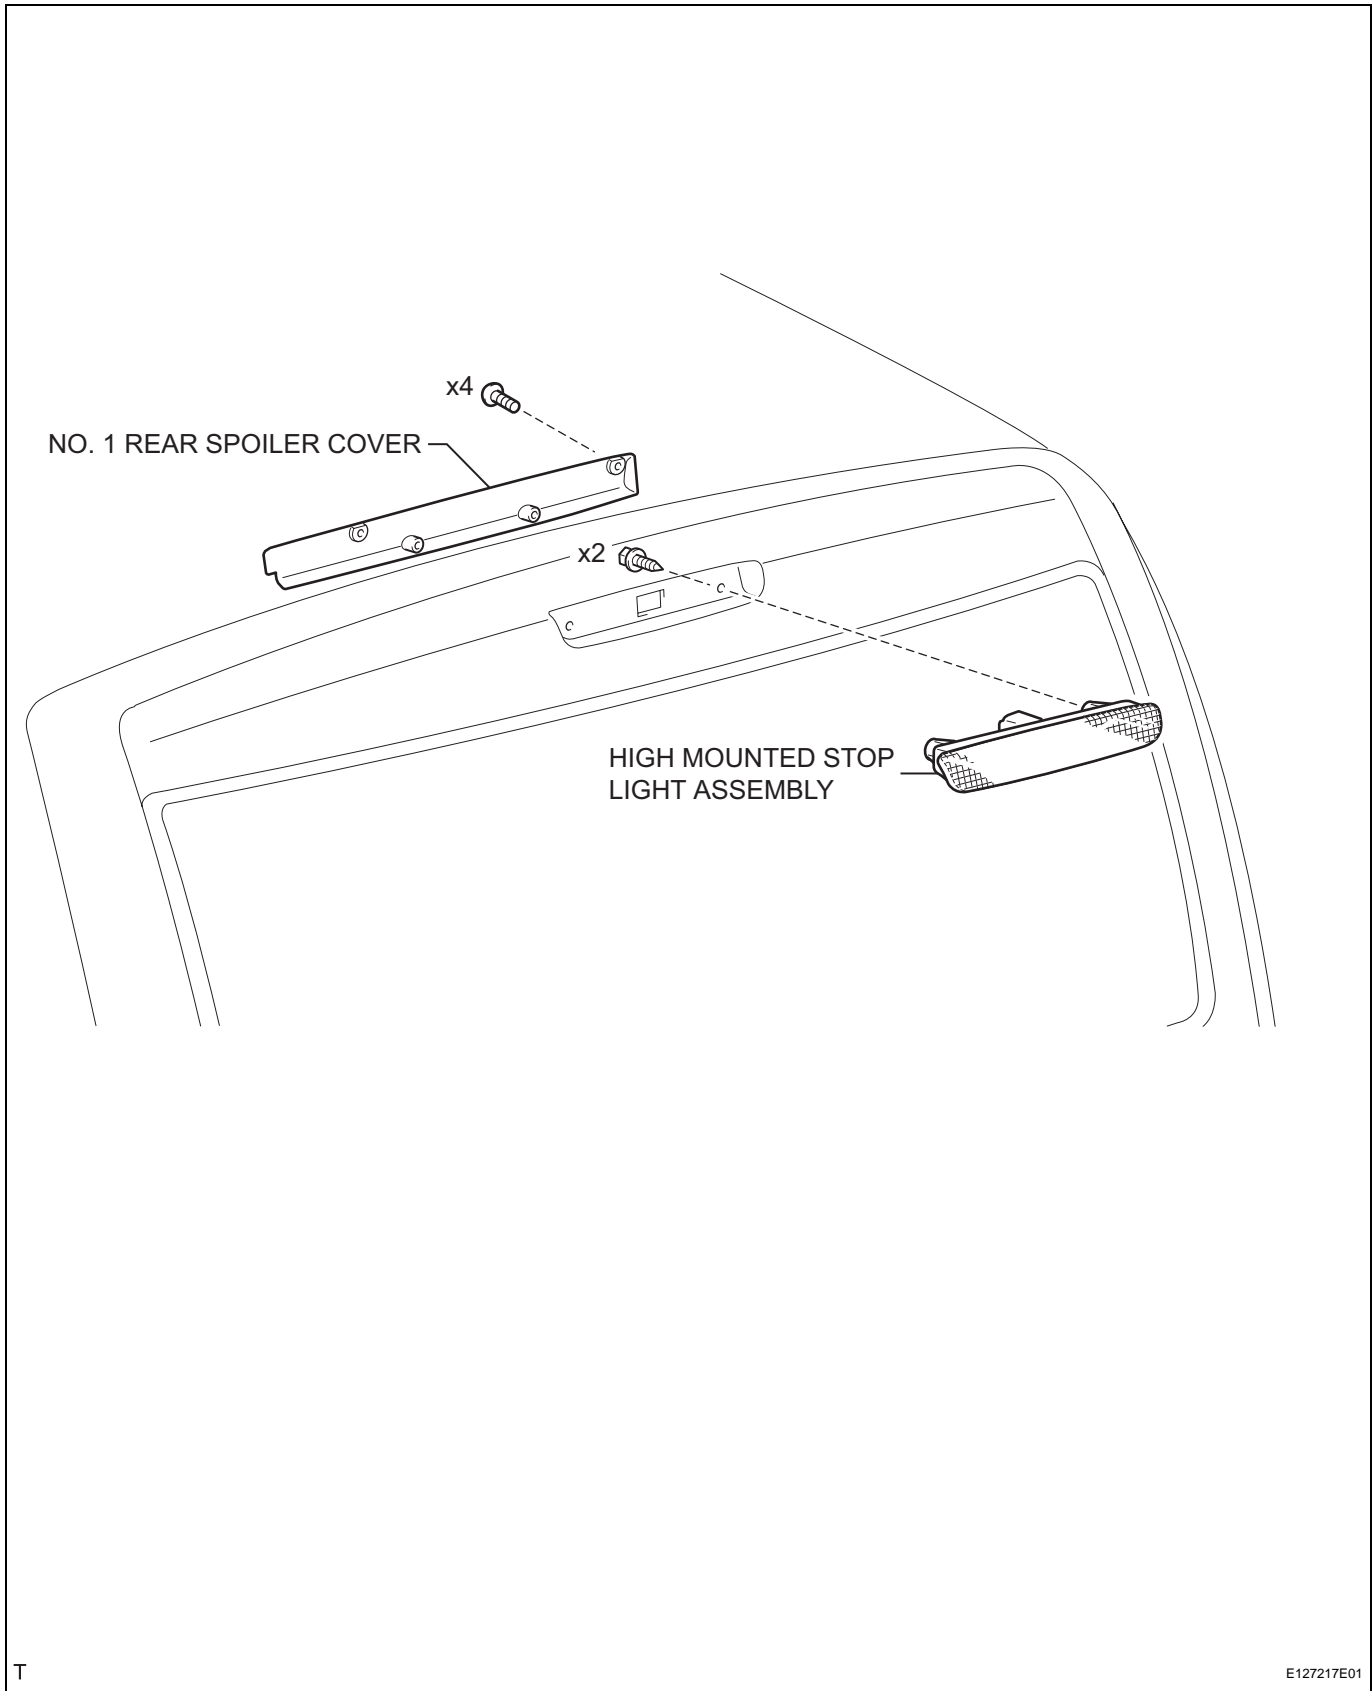


REMOVAL

1. **DISCONNECT CABLE FROM NEGATIVE BATTERY TERMINAL**
2. **REMOVE NO. 1 REAR SPOILER COVER**
 - (a) Remove the 4 screws and No. 1 rear spoiler cover.

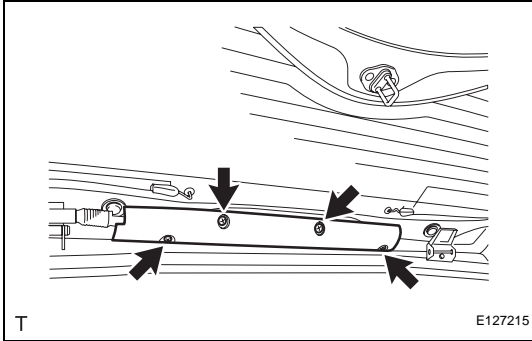


3. **REMOVE HIGH MOUNTED STOP LIGHT ASSEMBLY**
 - (a) Remove the 2 screws.
 - (b) Disconnect the connector and remove the high mounted stop light.

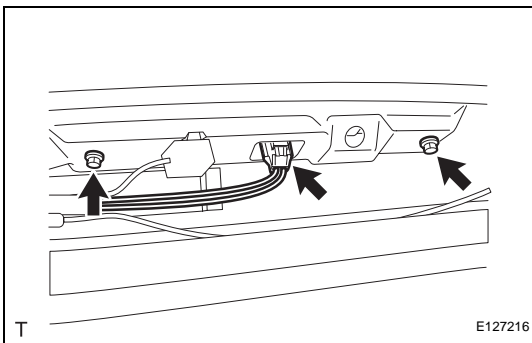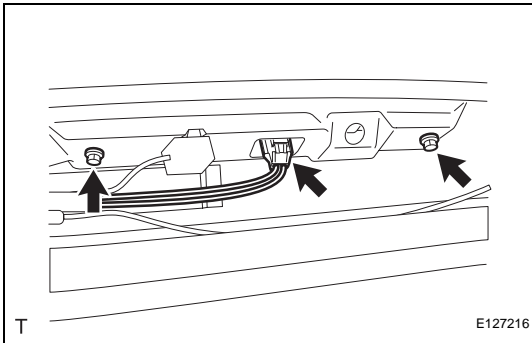

INSTALLATION

1. **INSTALL HIGH MOUNTED STOP LIGHT ASSEMBLY**
 - (a) Connect the connector.
 - (b) Install the high mounted stop light with the 2 screws.

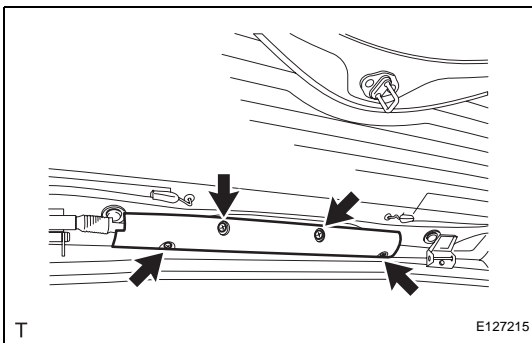

2. **INSTALL NO. 1 REAR SPOILER COVER**
 - (a) Install the No. 1 rear spoiler cover with the 4 screws.
3. **CONNECT CABLE TO NEGATIVE BATTERY TERMINAL**
Torque: 3.9 N*m (40 kgf*cm, 35 in.*lbf)