


**3. REMOVE REAR NAME PLATE**


- (a) Apply protective tape to the back door panel in the area around the rear name plate.
- (b) Using an infrared light, heat the rear name plate.  
**CAUTION:**  
**Do not burn yourself with the heated back door panel or infrared light.**  
**HINT:**  
Heat at 40 to 60°C (104 to 140°F) for 1 to 2 minutes.
- (c) Using a gasket scraper with its tip wrapped in protective tape, gradually peel the adhesive surface and remove the rear name plate.
- (d) Remove the protective tape.

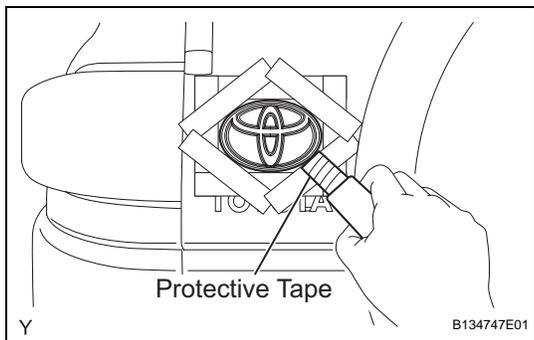

**INSTALLATION**

**1. INSTALL REAR NAME PLATE**

- (a) Clean the attachment surface.
  - (1) Using an infrared light, heat the double-sided adhesive tape remaining on the back door panel.  
**HINT:**  
Heat at 40 to 60°C (104 to 140°F) for 1 to 2 minutes.
  - (2) Using a shop rag or piece of cloth, rub the remaining double-sided adhesive tape off the back door panel while it is hot from the infrared light.  
**NOTICE:**  
**Installing the rear name plate while any double-sided adhesive tape remains on the back door panel may cause adhesion failure. Therefore, completely remove the double-sided adhesive tape.**
  - (3) Using a non-residue solvent, clean the attachment surface.
- (b) Align the 2 pins and install a new rear name plate as shown in the illustration.

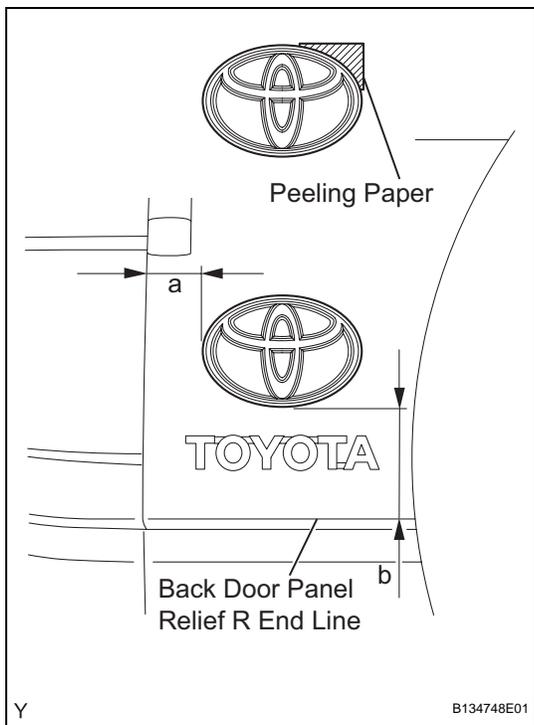


**Installation position**

Mark	Measurement (along surface)
a	49 mm (1.929 in.)
b	56.7 mm (2.232 in.)

**NOTICE:**

Install the rear name plate in an environment where the ambient temperature is over 20°C (68°F). If it is below 20°C (68°F), using an infrared light, heat the back door panel and the rear name plate up to 20 to 30°C (68 to 86°F) and install the rear name plate.

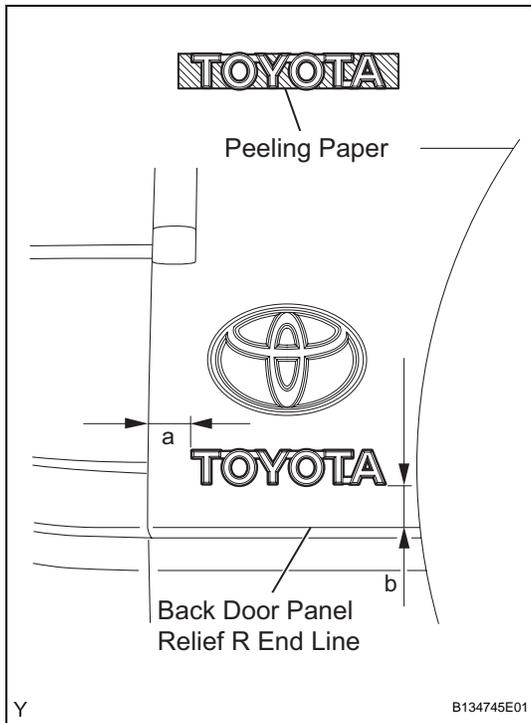**2. INSTALL NO. 2 BACK DOOR NAME PLATE**


- (a) Clean the attachment surface.
- (1) Using an infrared light, heat the double-sided adhesive tape remaining on the back door panel.  
HINT:  
Heat at 40 to 60°C (104 to 140°F) for 1 to 2 minutes.
  - (2) Using a shop rag or piece of cloth, rub the remaining double-sided adhesive tape off the back door panel while it is hot from the infrared light.
- NOTICE:**  
Installing the No. 2 back door name plate while any double-sided adhesive tape remains on the back door panel may cause adhesion failure. Therefore, completely remove the double-sided adhesive tape.
- (3) Using a non-residue solvent, clean the attachment surface.
- (b) Install a new No. 2 back door name plate as shown in the illustration.

**Installation position**

Mark	Measurement (along surface)
a	37 mm (1.457 in.)
b	14.5 mm (0.571 in.)

**NOTICE:**

Install the back door name plate in an environment where the ambient temperature is over 20°C (68°F). If it is below 20°C (68°F), using an infrared light, heat the back door panel and the No. 2 back door name plate up to 20 to 30°C (68 to 86°F) and install the No. 2 back door name plate.

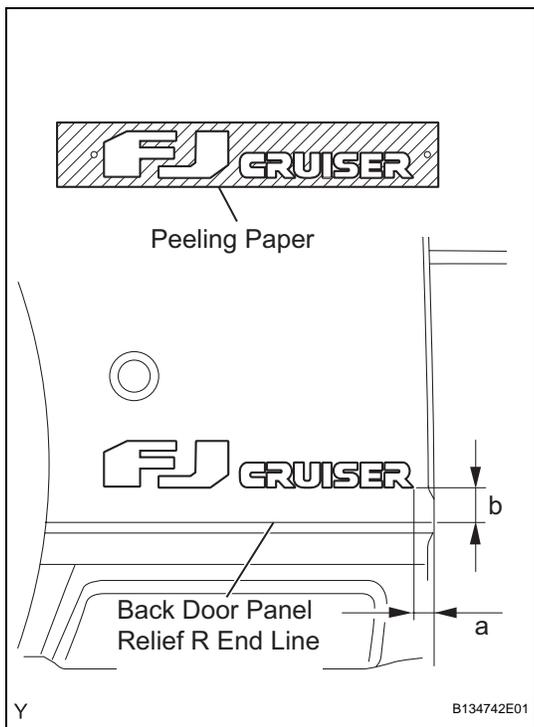

**3. INSTALL NO. 1 BACK DOOR NAME PLATE**

- (a) Clean the attachment surface.
  - (1) Using an infrared light, heat the double-sided adhesive tape remaining on the back door panel.
    - HINT:  
Heat at 40 to 60°C (104 to 140°F) for 1 to 2 minutes.
  - (2) Using a shop rag or piece of cloth, rub the remaining double-sided adhesive tape off the back door panel while it is hot from the infrared light.
    - NOTICE:**  
Installing the No. 1 back door name plate while any double-sided adhesive tape remains on the back door panel may cause adhesion failure. Therefore, completely remove the double-sided adhesive tape.
  - (3) Using a non-residue solvent, clean the attachment surface.
- (b) Install a new No. 1 back door name plate as shown in the illustration.

**Installation position**

Mark	Measurement (along surface)
a	28.4 mm (1.118 in.)
b	11.5 mm (0.453 in.)

**NOTICE:**

Install the No. 1 back door name plate in an environment where the ambient temperature is over 20 °C (68°F). If it is below 20°C (68°F), using an infrared light, heat the back door panel and the No. 1 back door name plate up to 20 to 30°C (68 to 86°F) and install the No. 1 back door name plate.