

Toyota FJ Cruiser

2006-Up

Set Part # 31924

Revision A 03-31-08



Step 1:

Prior to Installation:

- A) Fit:** Verify the fit of the flares to vehicle. (Some filing, sanding, or cutting may be necessary to ensure proper fit).
- B) Painting:** (Optional) if paint is desired it must be done prior to installing flares on the vehicle clean outer surface with a good grade degreaser. **DO NOT USE LACQUER THINNER OR ENAMEL REDUCER AS A DEGREASER.** Wipe outer surface thoroughly with a tack rag prior to paint.
Paint flares using a high quality enamel, or polyurethane automotive paint. (Application of a primer coat is optional)
If painting edge trim (not recommended), use a flex additive.
- C) Performance:** Using larger Tires may increase the area required to turn the vehicle. Some Tire/Rim combinations may require lowering bump stops and or installing steering stops to prevent tire from contacting flare.
- D) Exhaust System:** Modifications may be necessary to maintain a minimum 4" clearance between flares and exhaust pipes. (Exhaust gases should not vent directly onto flares)
- E) Metal Protection:** All exposed fasteners and bare metal should be treated with red oxide primer BEFORE installing flares. Spray inner fender wells with undercoating AFTER flare attachments have been completed.

TOOLS FOR EASY INSTALLATION

- Pry Tool
- Flat Head Screwdriver
- Socket Wrench
- 10mm Socket
- 1/2" Socket
- 7/16" Socket
- Electric Drill
- 5/16" Drill Bit
- Grease Pencil
- #2 Phillips Screwdriver
- Utility Knife or Cutting Tool

NOTE: THESE INSTRUCTIONS INVOLVE CUTTING PARTS OF THE VEHICLE. IT IS IMPORTANT TO READ ALL INSTRUCTIONS PRIOR TO CUTTING AND INSTALLATION OF FLARES.

PARTS INCLUDED IN KIT

1. Left Front Flare
2. Right Front Flare
3. Front Flare Inner Pieces
4. Left Rear Flare Pieces (Main and Lower)
5. Right Rear Flare Pieces (Main and Lower)
6. Edge Trim (324 inches)
7. "U" Clip (4 pieces)
8. Pan Head Screw (4 pieces)
9. #14 Hex Head Bolt (24 pieces)
10. Christmas Tree Fastener (4 pieces)
11. Plastic Grommet (2 pieces)
12. Steel Bolt (4 pieces)
13. Nylock Nut (4 pieces)
14. Large Washer (8 pieces)

1.



Left Front Flare

2.



Right Front Flare

3.



Front Flare Inner Pieces

4.



Left Rear Flare Pieces

5.



Right Rear Flare Pieces

6.



Edge Trim

7.



"U" Clip

8.



Pan Head Screw

9.



#14 Hex Head Bolt

10.



Christmas Tree Fastener

11.



Plastic Grommet

12.



Steel Bolt

13.



Nylock Nut

14.



Large Washer

FLARE INSTALLATION PROCEDURES

Step 2: Edge Trim Installation (See Illustration #1)

- A) Peel two to three inches of red backing away from edge trim tape. Applying the adhesive side of the edge trim to the inner side of the flare, affix the edge trim to the top edge of the flare. **See Illustration #1.**
- B) Press edge trim into place along the top edge of the outer flare in one-foot increments, pulling red backing free as you continue to work your way around the top edge of the flare.

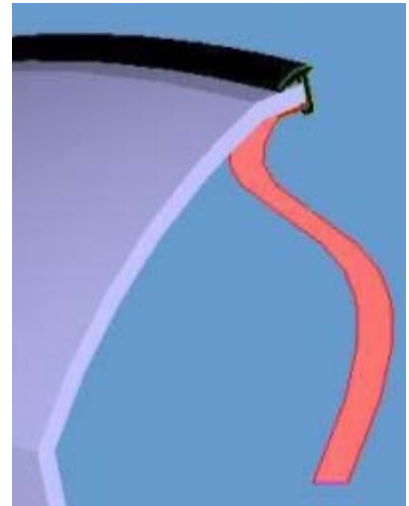


Illustration #1

Step 3: Front Factory Flare Removal (See Photos #1 through #11)



1
Remove six bolts from wheel well using a 10mm socket.



2
Remove two bolts connecting factory flare to mudflap as shown (one plastic fastener removed in Step 3 is located here as well).



3
Remove three plastic fasteners using a flat head screw driver or pry tool.



4
Using a utility knife, cut along seam connecting factory flare to rocker. Cut down to mud flap area.



Using a utility knife, cut splash guard flush with edge of sheet metal also.




Trim an additional 3/4" from rocker, so that end of rocker is within confines of sheet metal. NOTE: The Flare will cover this area to 1/4" from the door seam.




Cut front of factory flare along bumper, taking care not to cut bumper.



Trim remaining plastic flush with bumper.

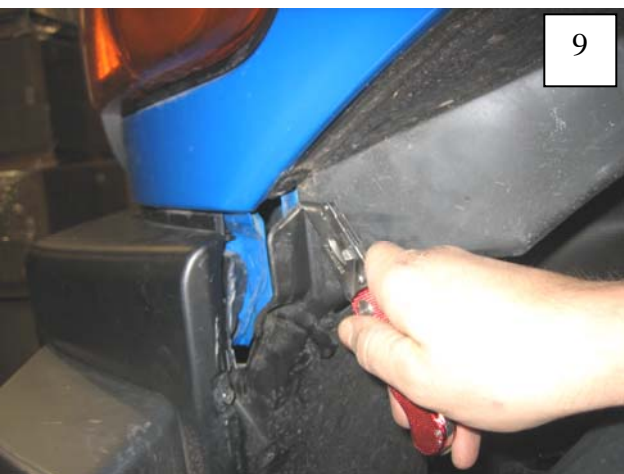

Trim plastic tab along seam.

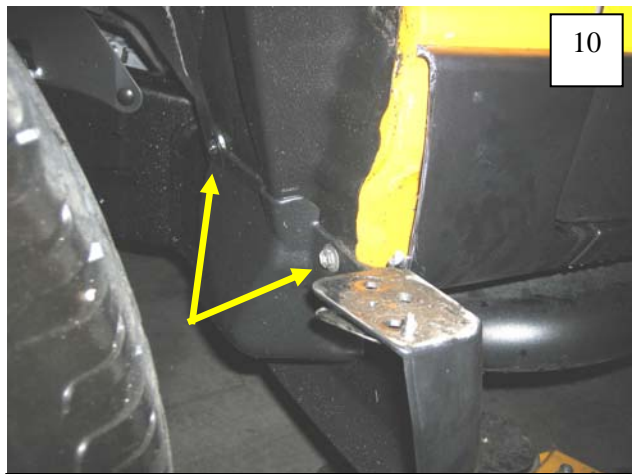

Remove mud flap bolts as shown (2 places).



Remove third mud flap bolt, and remove mud flap.

Step 4: Front Flare Installation (See Photos #12 through #17)



Holding Front Inner Piece on front of wheel well next to bumper, use a grease pencil to mark two clip locations.



Remove Front Inner Piece, and drill two 5/16" holes on marks made in Step 12 (2 places).



Slide supplied "U" Clips over holes drilled in Step 13 (2 places). NOTE: Some trimming of plastic may be required for correct clip alignment.



Position Inner Front Piece on vehicle, aligning holes in part with holes in clips installed in Step 14. Install supplied Pan Head Screws.



16


Position Flare on fender. Install five supplied #14 Hex Head Bolts. Do not tighten. NOTE: It is helpful to install one of the top bolts first.



17

Install one supplied Christmas Tree Fastener in top hole. Check that edge trim is seated correctly, then tighten all bolts.

Step 5: Rear Factory Flare Removal (See Photos #18 through #30)

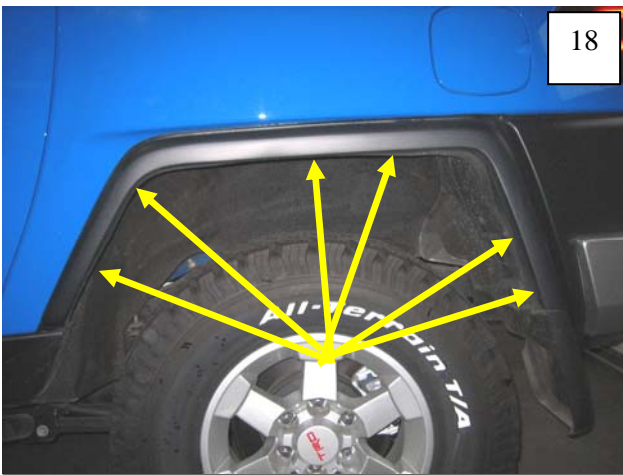

18

Using a 10mm socket, remove six bolts.



19

Remove two bolts from mud flap.



20

Using a pry tool or flat head screwdriver, remove one plastic fastener.



21

Remove one plastic fastener from mud guard.



22

Remove bolt from mud guard located inside wheel well.



23

Pull back rear plastic panel to access bolt inside. Plastic clips will release, making a popping sound.



24

Remove bolt located behind rear plastic panel. NOTE: if the socket does not fit in the enclosed space, a Phillips screwdriver will work.



25

Remove 10mm bolt to remove mud flap completely.



26

Remove bolt from underside of factory flare (behind panel). Pry flare from fender, releasing plastic clips.



27

Using a pushing motion to engage clips, replace rear plastic panel.




28

At front of wheel well, use pry tool or knife to pry plastic grommet from sheet metal. Discard grommet, leaving a square hole.



29

Cut along rocker panel so that it is trimmed flush with sheet metal.

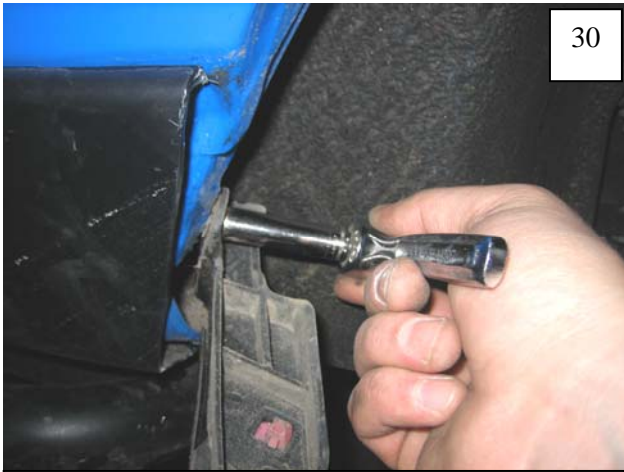

30

Remove last bolt holding the rear flare on, at the front of the wheel well. Remove flare.

Step 6: Rear Flare Installation (See Photos #31 through #36)




31

Install a supplied plastic grommet in square hole at front of wheel well.



32


To attach Rear Main Flare to Lower Rear, slide a supplied Large Washer onto a supplied Steel Bolt.

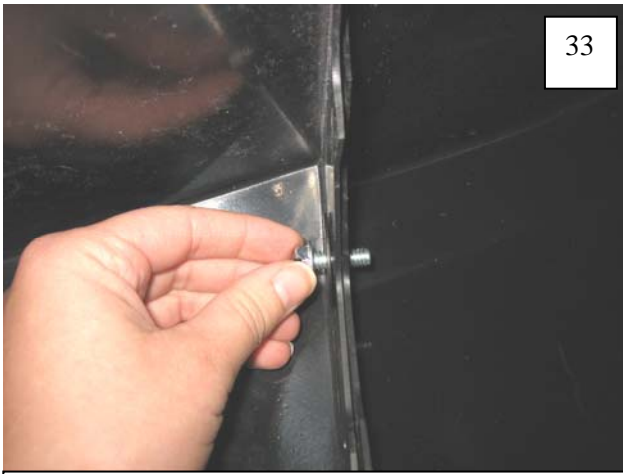

Align the holes in the Rear Main Flare with the holes in the Lower Rear, slide Bolt/Washer assembly through (2 places).



Slide a supplied Large Washer onto backside of bolt, and thread a supplied Nylock Nut onto bolt. Using a 10mm socket and 7/16" wrench, tighten bolts.

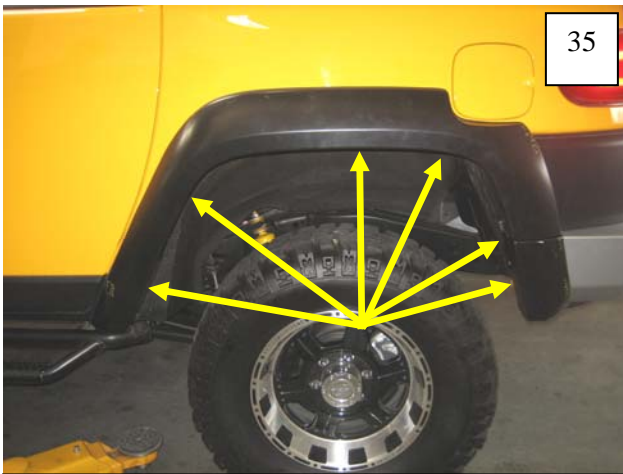

Position Flare on fender. Install six supplied #14 Hex Head Bolts. Do not tighten. NOTE: It is helpful to install one of the top screws first.



Install one supplied Christmas Tree Fastener in top forward hole. Check that edge trim is seated correctly, then tighten all bolts.