


# OUTER REAR VIEW MIRROR

## COMPONENTS

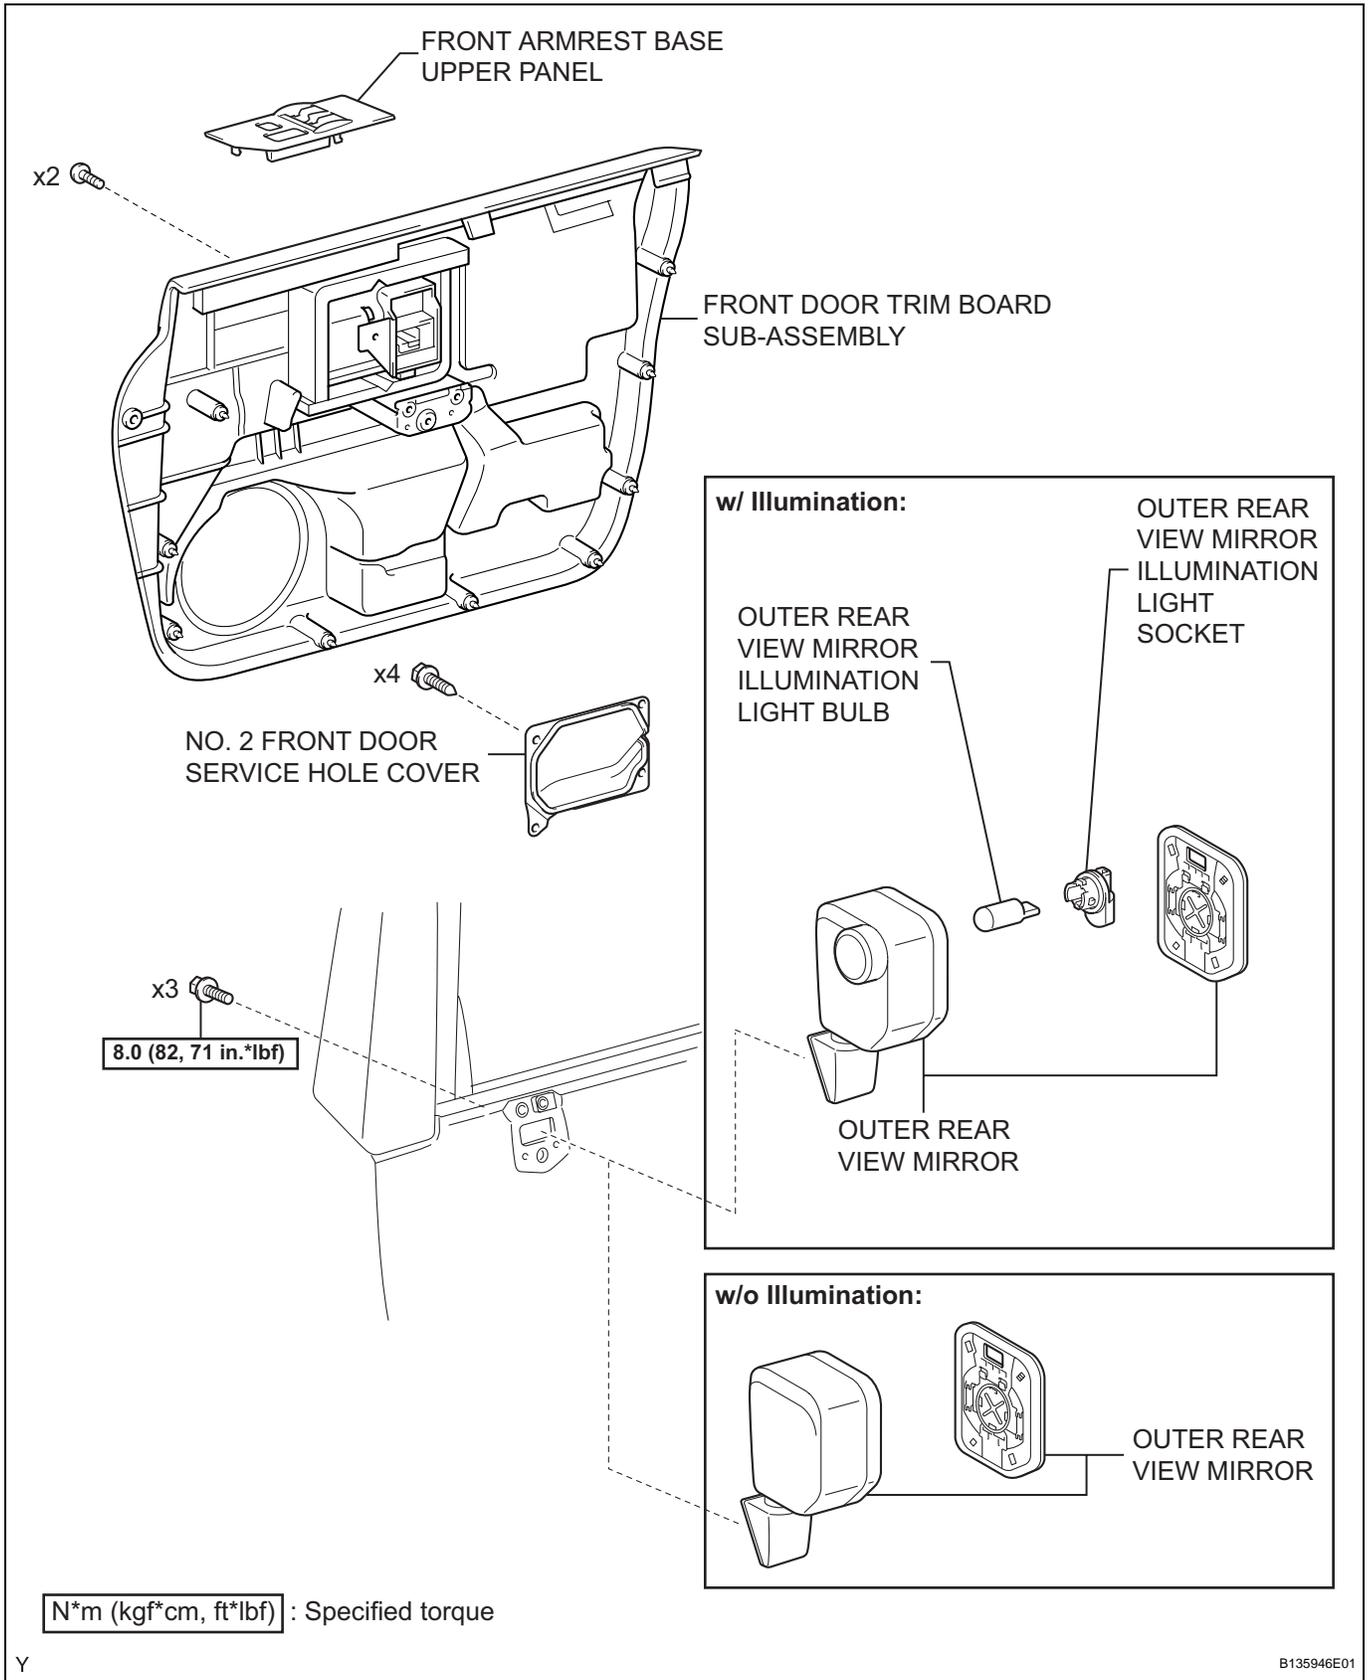

MI

## REMOVAL

### HINT:

- Use the same procedure for both the RH and LH sides.
- The procedure described below is for the LH side.

### 1. DISCONNECT CABLE FROM NEGATIVE BATTERY TERMINAL

### 2. REMOVE FRONT ARMREST BASE UPPER PANEL (See page [WS-25](#))

### 3. REMOVE FRONT DOOR TRIM BOARD SUB-ASSEMBLY

#### HINT:

Use the same procedure as for the RH side (see page [ED-9](#)).

### 4. REMOVE NO. 2 FRONT DOOR SERVICE HOLE COVER

#### HINT:

Use the same procedure as for the RH side (see page [ED-10](#)).

### 5. REMOVE OUTER REAR VIEW MIRROR

#### (a) Driver side:

Provisionally install the power window regulator master switch.

#### (b) Passenger side:

Provisionally install the power window regulator switch.


#### (c) Close the door glass.

#### (d) Disconnect the connector.


#### (e) Remove the 3 bolts and the outer rear view mirror.

#### **NOTICE:**

**Do not drop or damage the outer rear view mirror when removing the bolts.**

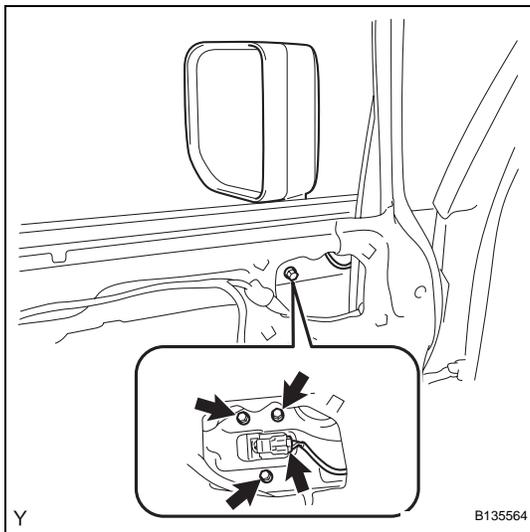


MI

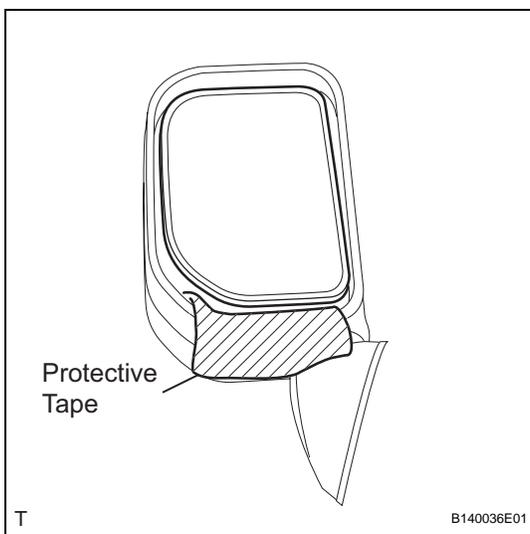


#### (f) Apply protective tape to the lower part of the mirror body.


#### (g) Press down the upper part of the mirror and tilt the mirror.

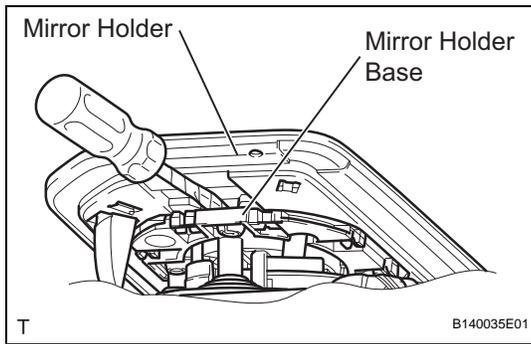

- (h) Using a screwdriver with its tip wrapped in protective tape, insert it between the mirror holder and the mirror holder base.

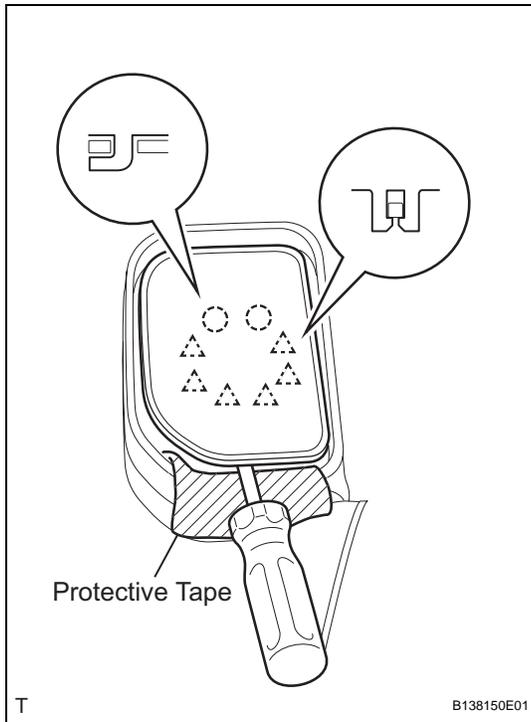

- (i) Twist and disengage the 2 clips on the lower side of the mirror.  
**HINT:**  
 Heating the mirror holder with a domestic dryer before this procedure makes the work easier.
- (j) While holding the mirror with the screwdriver, disengage the 4 clips and 2 claws on the upper side of the mirror and remove the mirror.
- (k) Driver side:  
 Remove the power window regulator master switch.
- (l) Passenger side:  
 Remove the power window regulator switch.

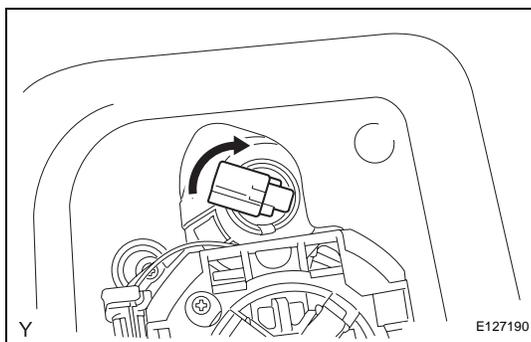

#### 6. REMOVE OUTER REAR VIEW MIRROR ILLUMINATION LIGHT BULB (w/ Illumination)

- (a) Turn the outer rear view mirror illumination light socket and bulb, in the direction indicated by the arrow in the illustration, to remove them.
- (b) Remove the outer rear view mirror illumination light bulb from the light socket.